

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

Description

The HCG800FH170D3RE2 is a Half Bridge IGBT Power Module. It integrates high performance IGBT chips designed for the applications such as High Power supply and Motor control.



Features

- Blocking voltage:1700V
- Low saturation voltage $V_{CE(sat)}$
- Low Switching Losses
- 175℃ maximum junction temperature
- Thermistor inside

Applications

- High Power Switching Applications
- Motor Drives
- Solar inverter Systems
- Wind Turbines

Circuit diagram

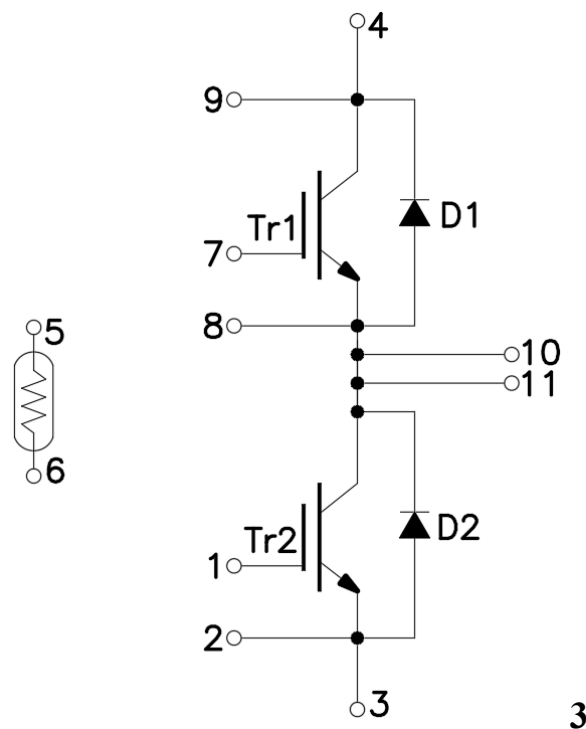


Figure 1. Out drawing & circuit diagram for HCG800FH170D3RE2

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

Pin Configuration and Marking Information

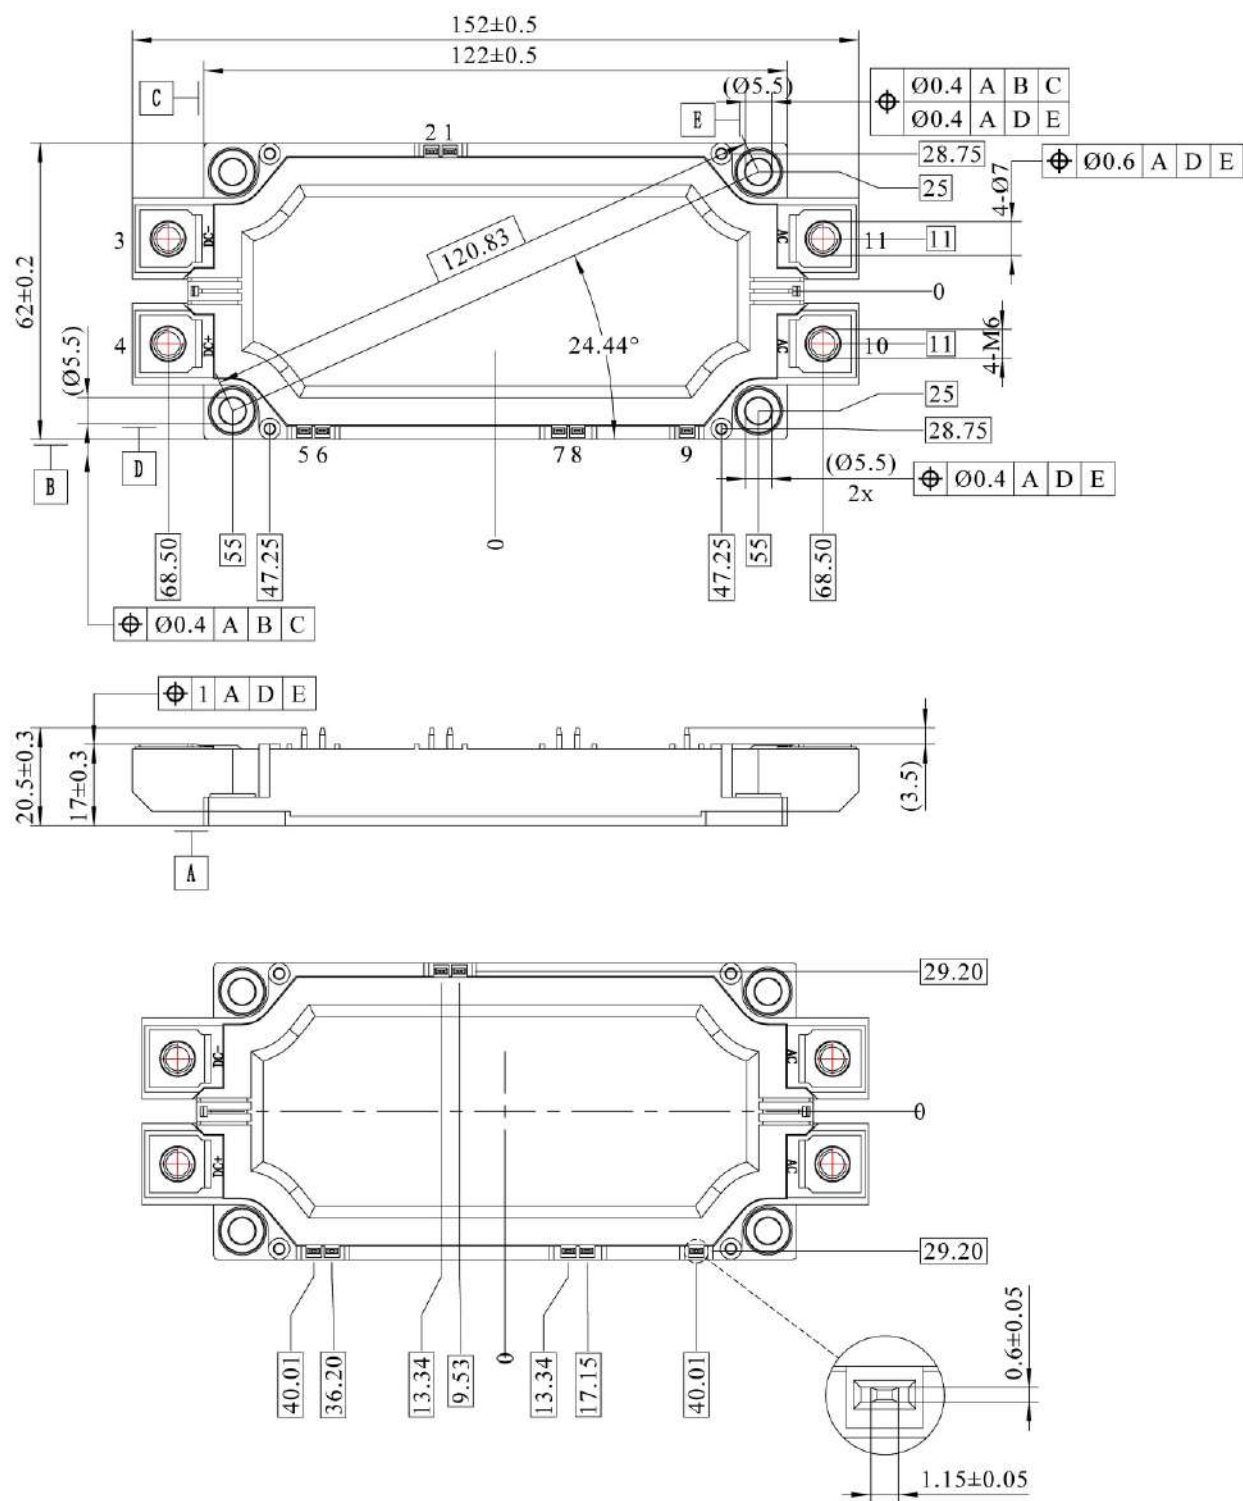


Figure 2. Pin configuration

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

Module

Parameter	Conditions	Value	Unit
Isolation Voltage	RMS, f=50Hz, t=1min	4.0	KV
Material of module baseplate	-	Cu	-
Creepage distance	terminal to heatsink terminal to terminal	14.5 13	mm
Clearance	terminal to heatsink terminal to terminal	12.5 10	mm
CTI	-	60	-
Module lead resistance, terminals–chip	T _C =25°C	0.8	mΩ
Mounting torque for module mounting	M5, M6	3 to 6	Nm
Weight	-	440	g

Maximum Ratings (T_j=25°C unless otherwise specified)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CES}	Collector-Emitter Voltage	G-E Short	1700	V
V _{GES}	Gate-Emitter Voltage	C-E Short	±20	V
I _C	DC Continuous Collector Current	T _C =115°C	800	A
I _{CM}	Pulse Collector Current	t _p =1ms, Note1	1600	A
P _C	Maximum Power Dissipation	T _C =25°C, T _j =175°C(IGBT)	4545	W
I _F	Diode Forward Current	-	800	A
I _{FRM}	Repetitive peak forward Current	t _p =1ms, Note1	1600	A
I ² t	I ² t-value	V _R =0V, t _p =10ms, T _j =125°C (Diode)	36000	A ² s
T _j	junction temperature	-	-40 to 175	°C
T _{stg}	Storage temperature	-	-40 to 125	°C

Note1: Pulse width limited by maximum junction temperature

NTC characteristics

Symbol	Parameter	Condition	Value			Unit
			Min.	Typ.	Max.	
R ₂₅	Resistance	T _C =25°C	-	5	-	kΩ
ΔR/R	Deviation of R100	T _C =100°C, R ₁₀₀ =493 Ω	-5	-	5	%
P ₂₅	Power dissipation	T _C =25°C	-	-	20	mW
B _{25/50}	B-value	R ₂ = R ₂₅ exp [B _{25/50} (1/T ₂ - 1/(298,15 K))]	-	3375	-	K
B _{25/80}	B-value	R ₂ = R ₂₅ exp [B _{25/80} (1/T ₂ - 1/(298,15 K))]	-	3411	-	K
B _{25/100}	B-value	R ₂ = R ₂₅ exp [B _{25/100} (1/T ₂ - 1/(298,15 K))]	-	3433	-	K

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

IGBT Electrical characteristics (T_j=25°C unless otherwise specified, chip)

Symbol	Item	Condition		Value			Unit
				Min.	Typ.	Max	
V _{CE(sat)} (Chip)	Collector-Emitter Saturation Voltage	I _C =800A V _{GE} =15V	T _J =25°C	-	1.78	2.14	V
			T _J =150°C	-	2.16	-	V
			T _J =175°C	-	2.24	-	V
V _{GE(th)}	Gate-Emitter threshold Voltage	I _C =24mA, V _{CE} =V _{GE}	T _J =25°C	5.0	5.8	6.5	V
I _{CES}	Collector- Emitter Cut off Current	V _{CE} =1700V, V _{GE} =0V	T _J =25°C	-	-	1	mA
I _{GES}	Gate-Emitter Leakage Current	V _{GE} =±30V, V _{CE} =0V	T _J =25°C	-	-	1.8	uA
C _{ies}	Input Capacitance	V _{CE} =25V V _{GE} =0V f =1MHz	T _J =25°C	-	49.5	-	nF
C _{oes}	Output Capacitance		T _J =25°C	-	1.8	-	nF
C _{res}	Reverse transfer Capacitance		T _J =25°C	-	0.75	-	nF
Q _G	Gate charge	V _{GE} = -15V to +15V	T _J =25°C	-	6.2	-	uC
R _{Gint}	Internal gate resistor	-	T _J =25°C	-	1.7	-	Ω
t _{d(on)}	Turn-on delay time	V _{CC} =900V I _C = 800A V _{GE} =+15V/-8V R _G =1.0Ω Inductive load	T _J =25°C	-	209	-	ns
			T _J =150°C	-	214	-	
t _r	Rise time		T _J =25°C	-	109	-	ns
			T _J =150°C	-	188	-	
t _{d(off)}	Turn-off delay time		T _J =25°C	-	551	-	ns
			T _J =150°C	-	634	-	
t _f	Fall time		T _J =25°C	-	406	-	ns
			T _J =150°C	-	735	-	
E _{on}	Turn-on power dissipation		T _J =25°C	-	432.2	-	mJ
			T _J =150°C	-	707.6	-	
E _{off}	Turn-off power dissipation		T _J =25°C	-	178.8	-	mJ
			T _J =150°C	-	273.5	-	
I _{SC}	SC data	V _{GE} ≤15V, V _{CC} =900V	t _p <10us T _J =150°C	-	3000	-	A
R _{th(j-c)}	Thermal Resistance, Junction to Case (IGBT)			-	-	0.033	°C/W
R _{th(c-s)}	Thermal Resistance, Case to sink (Conductive Grease applied)			-	0.015	-	°C/W

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

Freewheeling Diode Electrical characteristics (T_j=25℃ unless otherwise specified, chip)

Symbol	Item	Condition		Value			Unit
				Min.	Typ.	Max	
V _F	Diode Forward Voltage	I _F =800A, V _{GE} =0V	T _j =25°C	-	2.30	-	V
			T _j =150°C	-	2.61	-	
			T _j =175°C	-	2.58	-	
t _{rr}	Reverse recovery time	(Switch side) V _{CC} =900V, I _C =800A V _{GE} =+15V/-8V	T _j =25°C	-	1.11	-	us
			T _j =150°C	-	1.59	-	
I _{RM}	Peak reverse recovery Current	V _{GE} =+15V/-8V R _G =1.0 Ω	T _j =25°C	-	283	-	A
			T _j =150°C	-	346	-	
Q _{rr}	Recovered charge	(FRD side) V _{rr} =900V, I _F =800A V _{GE} =+15V/-8V	T _j =25°C	-	117	-	uC
			T _j =150°C	-	248	-	
E _{rr}	Reverse recovered energy	Inductive load switching operation	T _j =25°C	-	58.8	-	mJ
			T _j =150°C	-	138.7	-	
R _{th(j-c)}	Thermal Resistance, Junction to Case (Diode)			-	-	0.055	°C/W
R _{th(c-s)}	Thermal Resistance, Case to sink (Conductive Grease applied)			-	0.015	-	°C/W

Test Conditions

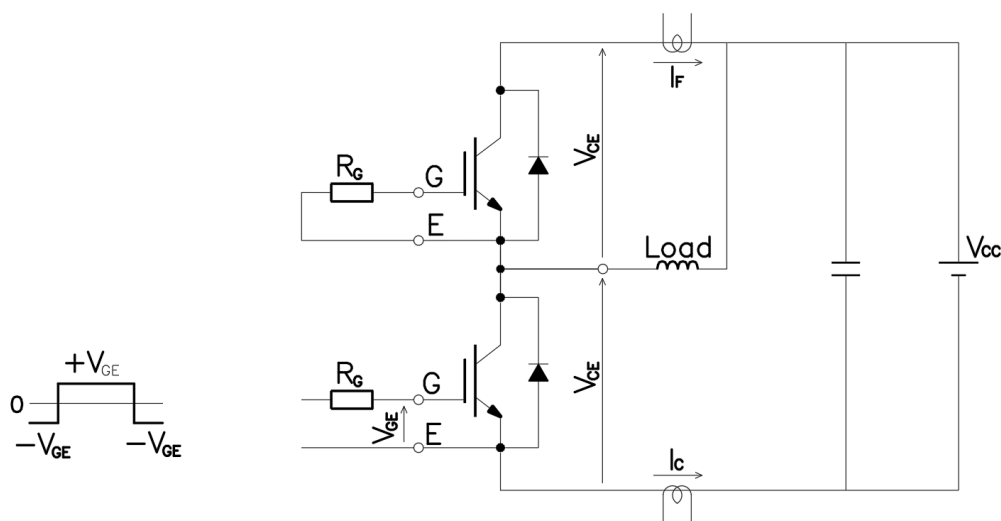


Figure 3. Switching time measure circuit

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

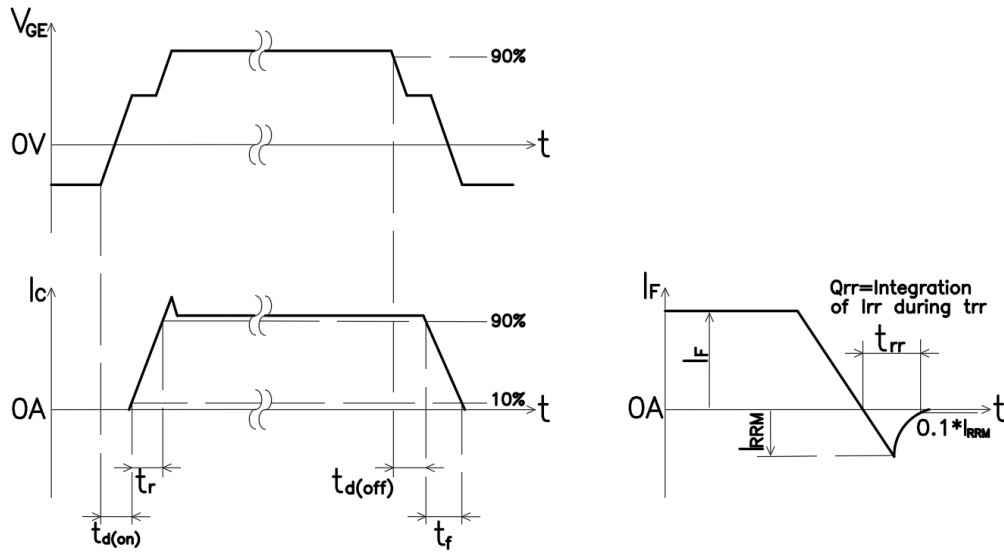


Figure 4. Switching time definition

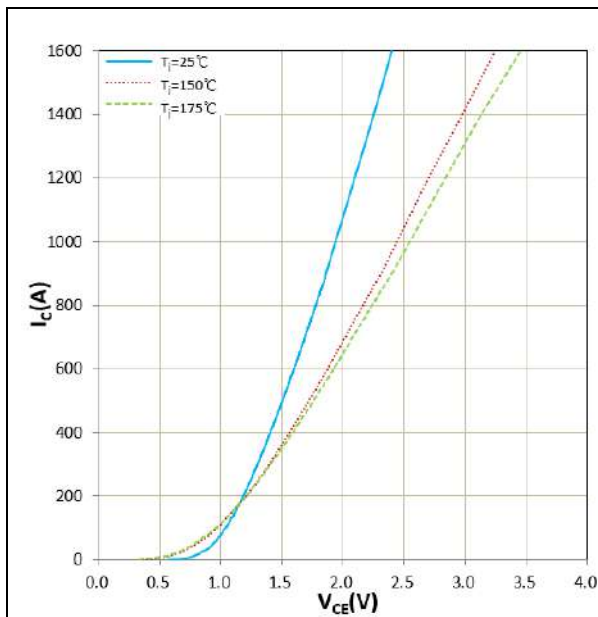


Figure 5. I_C vs V_{CE}
 $V_{GE}=15V$

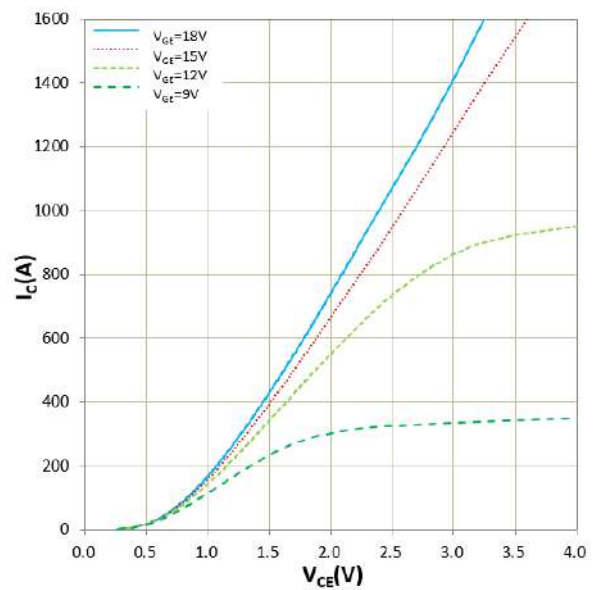


Figure 6. I_C vs V_{CE}
 $T_j=175^{\circ}C$

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

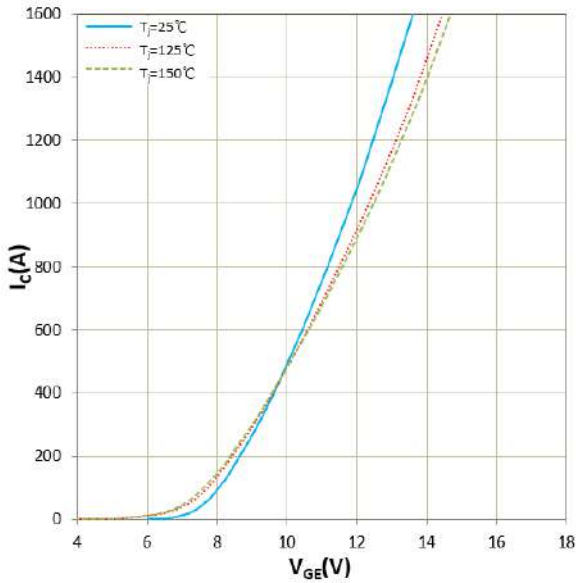


Figure 7. I_C vs V_{GE}
 $V_{CE}=20\text{V}$

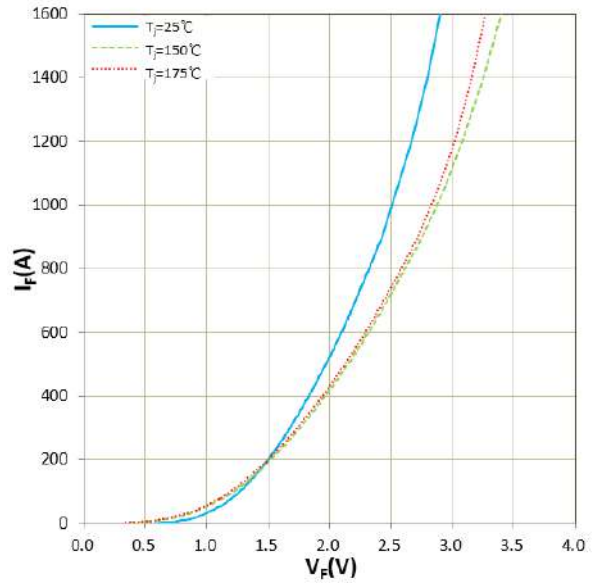


Figure 8. I_F vs V_F

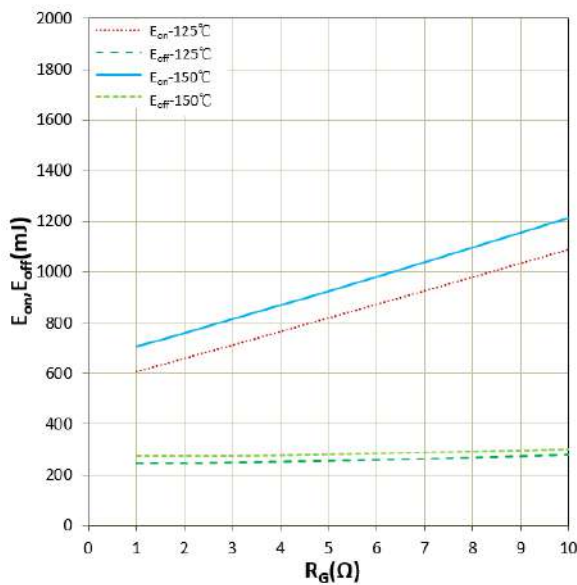


Figure 9. E_{on} , E_{off} vs R_G (Typ)
 $V_{CC}=900\text{V}$, $V_{GE}=+15\text{V}/-8\text{V}$, $I_C = 800\text{A}$
Inductive Load


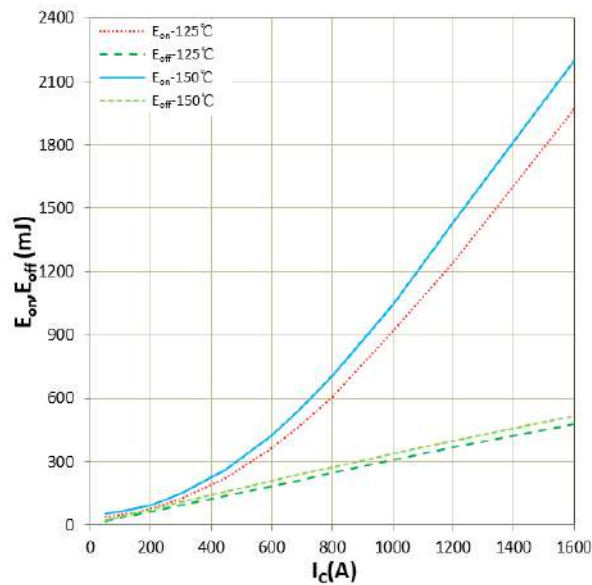


Figure 10 E_{on} , E_{off} vs I_C (Typ)
 $V_{CC}=900\text{V}$, $V_{GE}=+15\text{V}/-8\text{V}$, $R_G=1.0\Omega$
Inductive Load

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

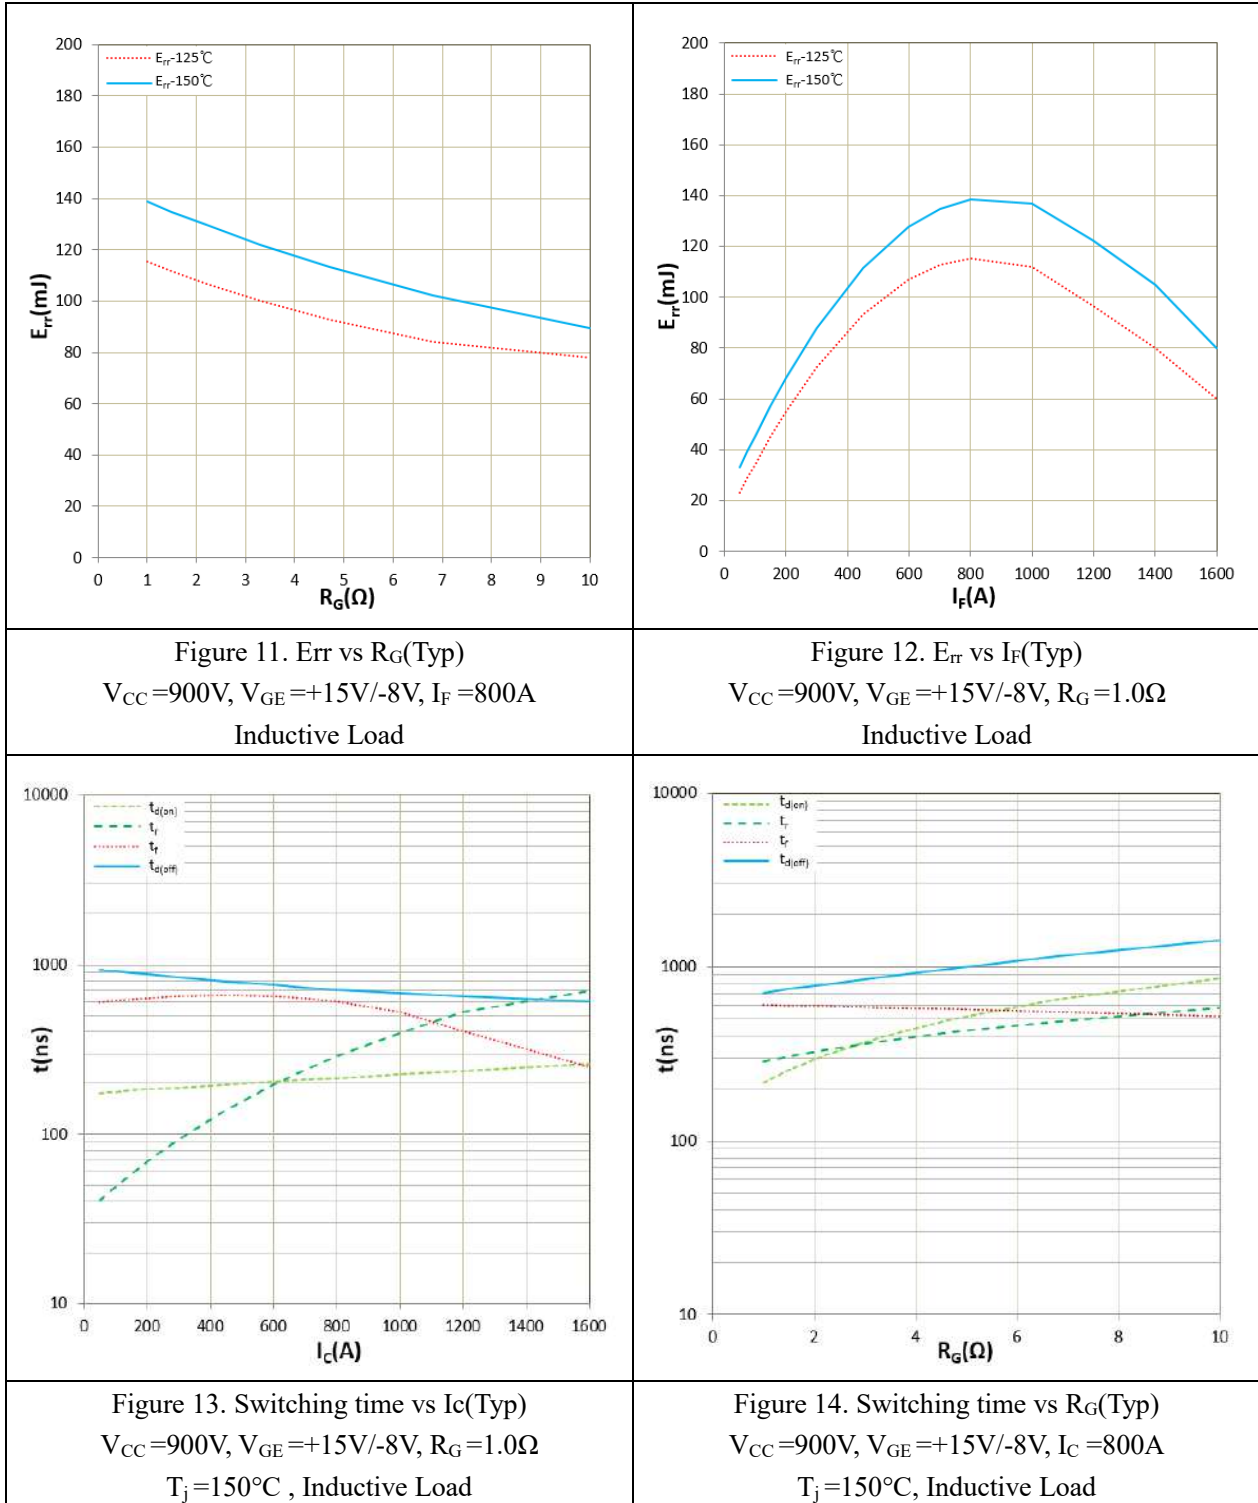

HCG800FH170D3RE2

1700V/800A Half Bridge IGBT Module

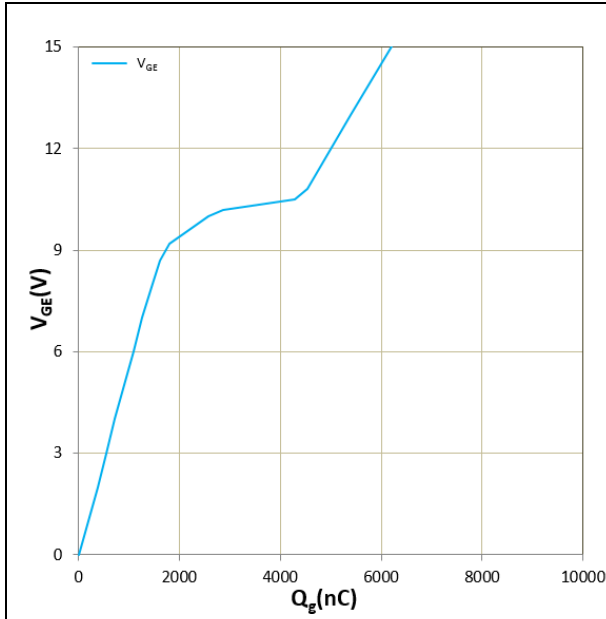


Figure 15. Gate charge

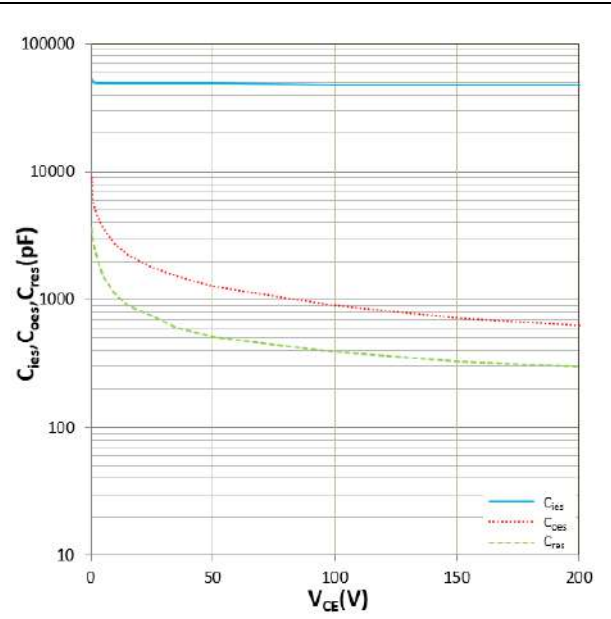


Figure 16. C_{ies} , C_{oes} , C_{res} vs V_{CE}
 $T_j = 25^\circ\text{C}$, $f = 1\text{MHz}$

IMPORTANT NOTICE:

This product data sheet describes the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively under the terms and conditions of the supply agreement. There will be no guarantee or of any kind for the product and its characteristics.

The data contained in this document is exclusively intended for technically trained staff. You and your technical departments will have to evaluate the product's suitability for the intended application and the completeness of the product data concerning such application.

Due to technical requirements, our product may contain dangerous substances. For information on the types in question, please contact the sales staff responsible for you.

Changes to this product data sheet are reserved.

Please contact the sales staff (sales@hiitio.com) for further information on the product, technology, delivery terms, conditions and prices.

Revision History

Document Version	Description of Changes
RevX.0.1	Released

Zhejiang HIITIO New Energy Co., Ltd

ADD : NO.1125 Zhixing Road,Qiaonan District, Xiaoshan Economic and
Technological Development Zone, Hangzhou, Zhejiang

TEL :400-667-9977

