



ZJW200A Dc contactor specifications

Mounting Dimension

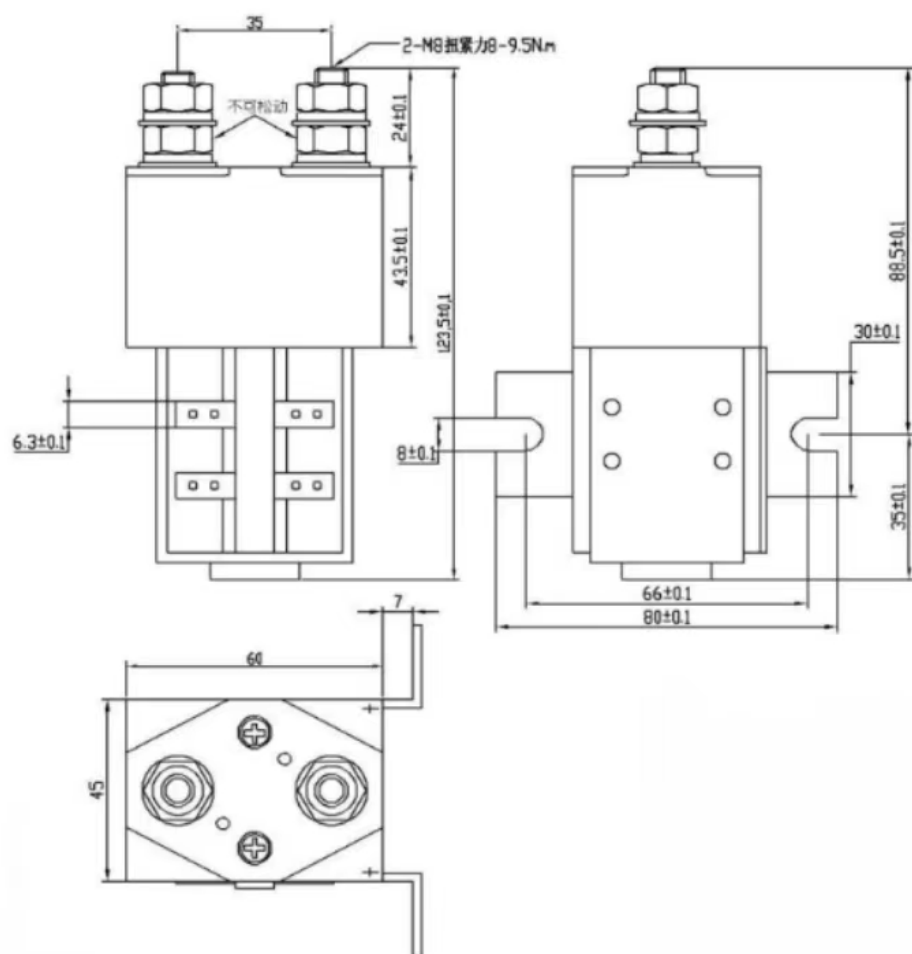


Amperogram

Time (seconds)

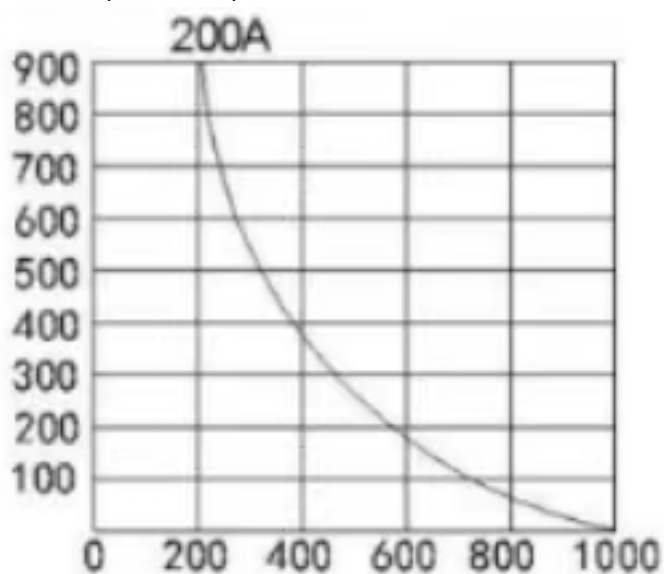

Current (A)

Wiring Diagram

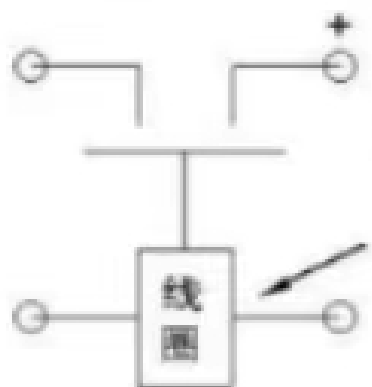

Product data sheet

Rated heating current 100% I _{th}	200A
Maximum contact voltage (inductive load)	
Contact type	Open all the way
Without blowing magnetic	48V D.C
With blowing magnetic	96V D.C
Contact voltage drop	100A<50mV
Mechanical life	>300000
Electrical life	>100000
Coil power consumption	
Intermittent working	30-40 Watts
Long-term working	15-30 Watts
Intermittent working voltage	60%V
Continuous working voltage	66%V
Release voltage	5-25%V
Contact jitter time	<3ms
Weight	660g
Storage and transportation	-40 ° C to +85 ° C
Class of protection	IP00